
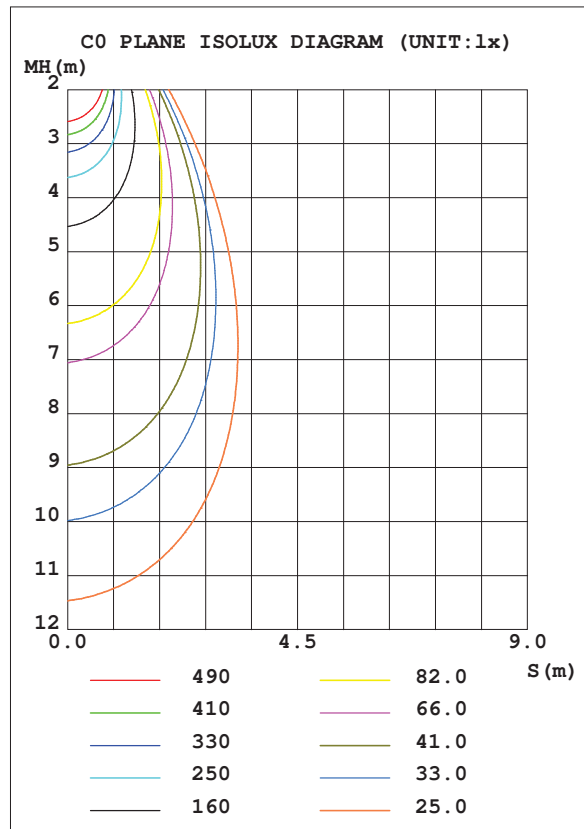


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.46V I:0.1257A P:12.047W PF:0.4160 Freq:50.00Hz Lamp Flux:1320x1 lm		
NAME: FLEXIBLE LED STRIP	TYPE:LED NEON FLEX	WEIGHT:
SPEC.:WW	DIM.: 1000 x 21 x 12.1	SERIAL No.:1766
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3240	I <sub>max</sub> (cd)	3309	S/MH (C0/180)	0.85
NOMINAL POWER (W)	10	LOR (%)	95.1	S/MH (C90/270)	0.25
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1255.4	η UP, DN (C0-180)	0.0, 49.4
NOMINAL FLUX (lm)	1320	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 45.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	95.1	CIBSE SHR MAX	1.00

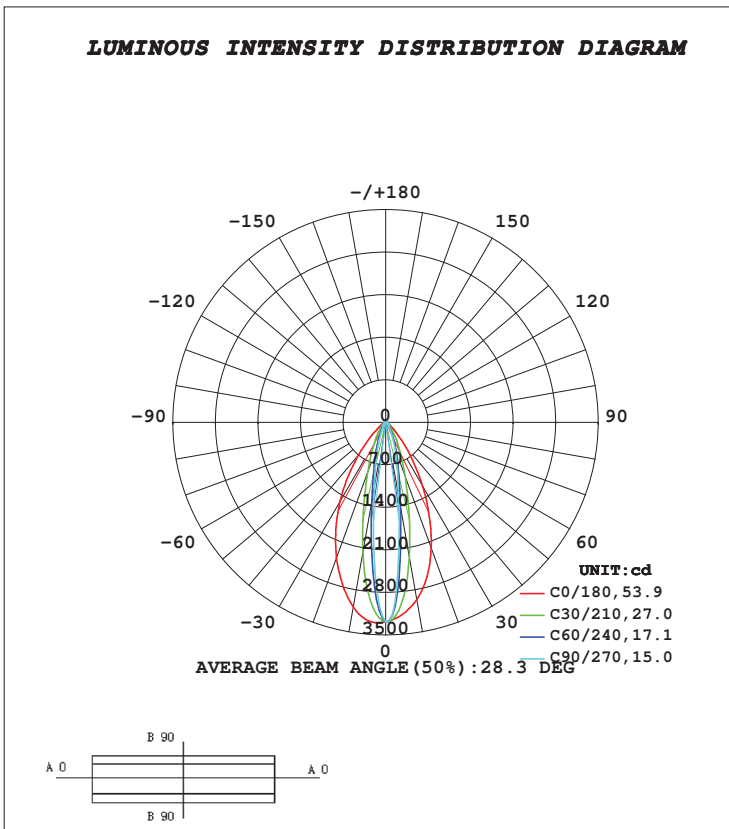

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 02 September 2020**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.825m [K=1.0000]**  
**Remarks:**