


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.47V I:0.1448A P:13.973W PF:0.4186 Freq:49.99Hz Lamp Flux:1675.8x1 lm		
NAME: LINEAR WALL WASHER	TYPE:LINEAR LIGHTING	WEIGHT:
SPEC.:CW, NICHIA	DIM.: 500 x 35 x 78	SERIAL No.:2104
MFR.: K-LITE	SUR.:	Shielding Angle:30°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3092	Imax (cd)	2366	S/MH (C0/180)	0.58
NOMINAL POWER (W)	12	LOR (%)	55.6	S/MH (C90/270)	0.37
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	931.13	η UP, DN (C0-180)	0.0, 25.4
NOMINAL FLUX (lm)	1675.8	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 30.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	55.6	CIBSE SHR MAX	0.50

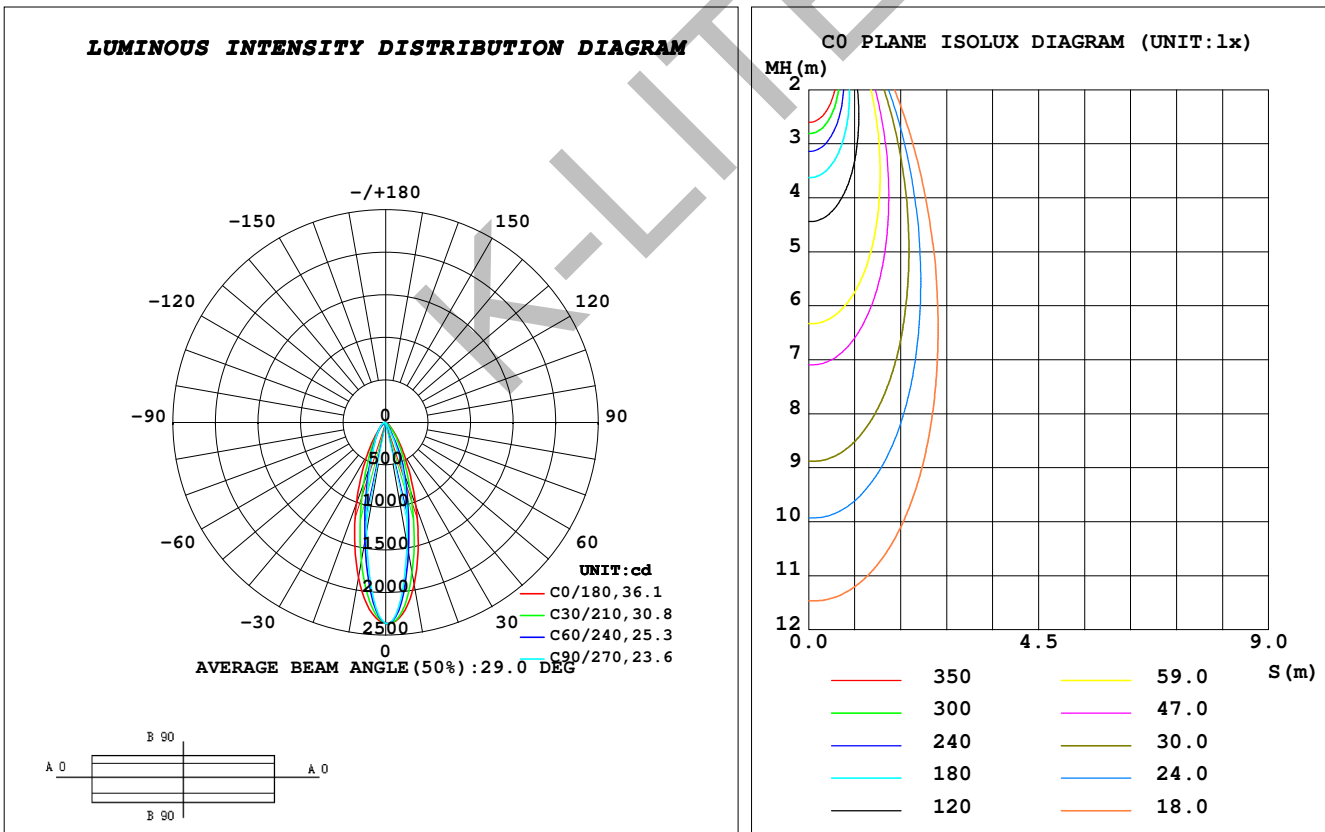

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 08 October 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: