




INSPIRATION



Open Source

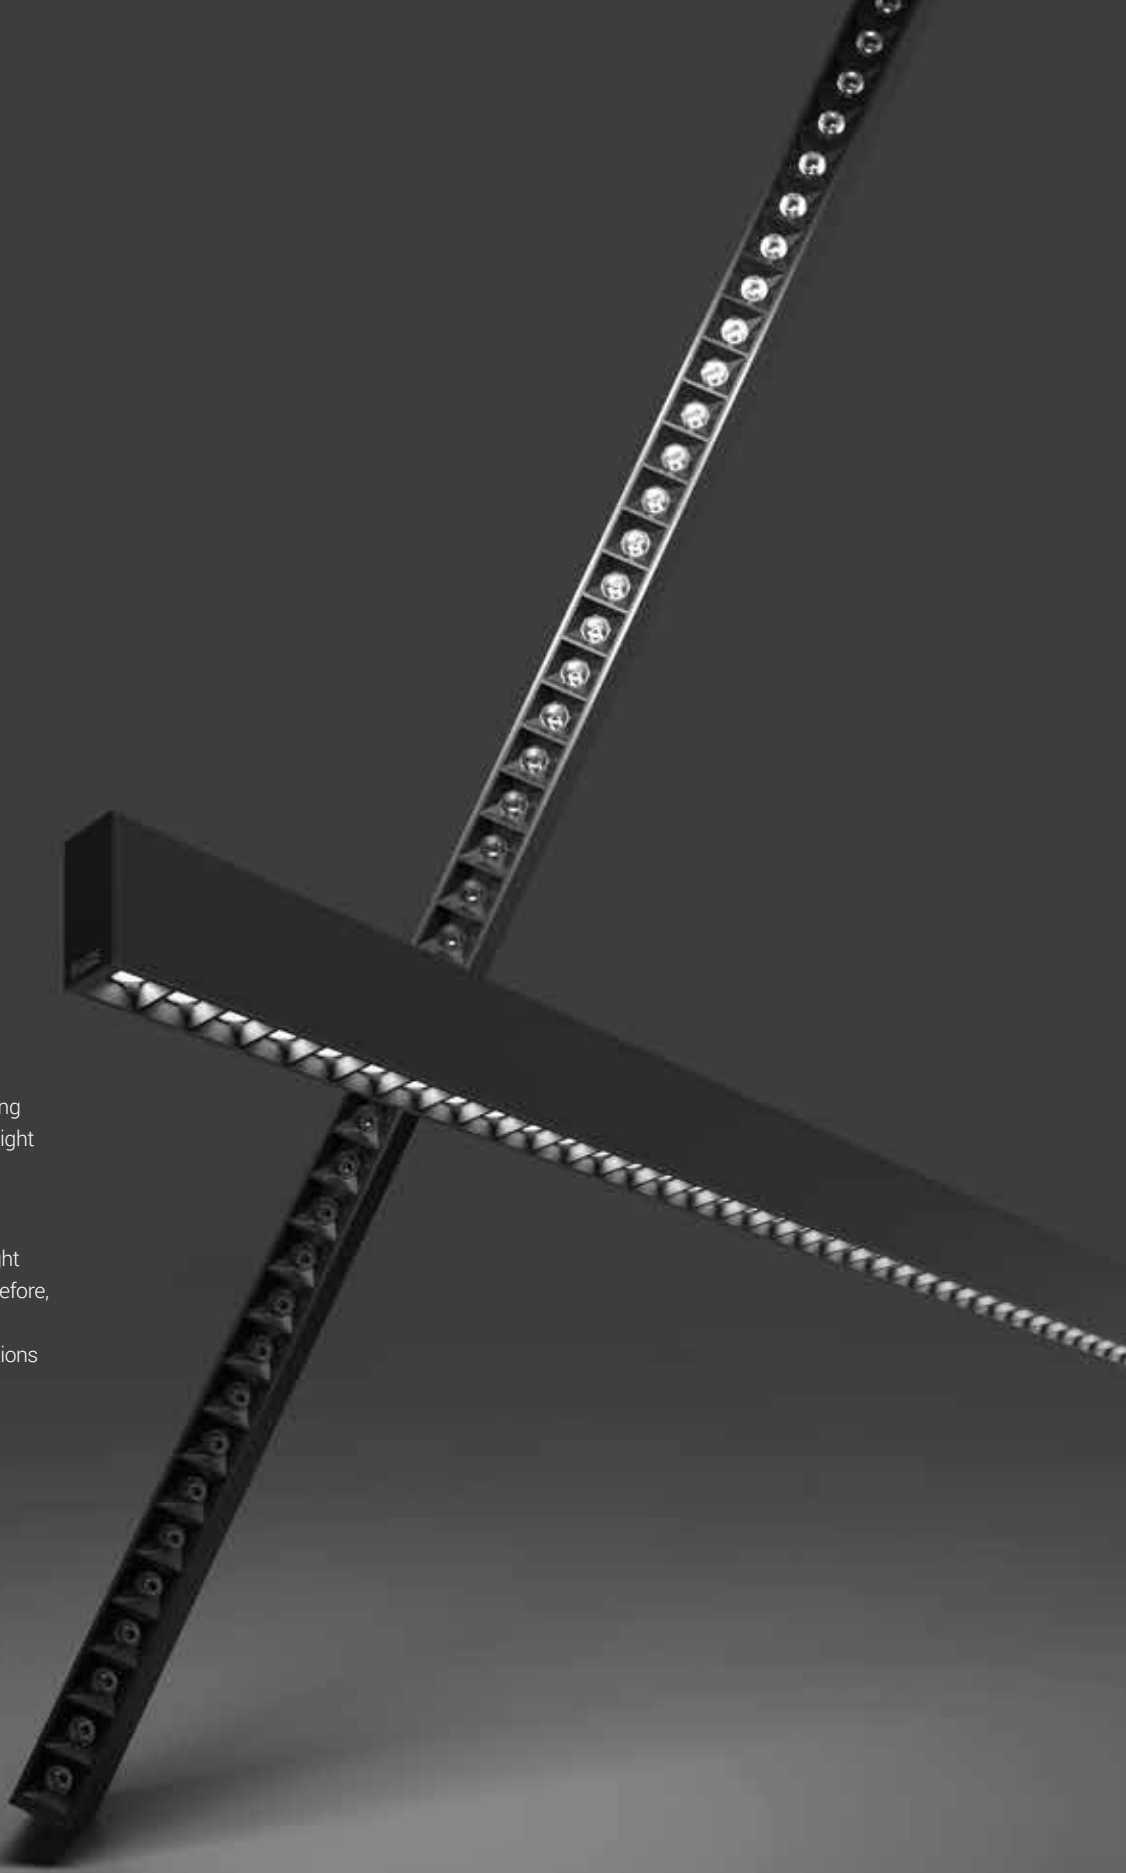


REVO

MINIMALIST

Revo impresses with its up to 3.5 meters long elegant housing, bringing you more quality light with cost-savings.

Due to its length and low UGR, it delivers a homogenous and efficient distribution of light that enables less luminaires per room. Therefore, it is most suitable for open-space offices, corridors, foyers, conference rooms, institutions and other spacious environments.

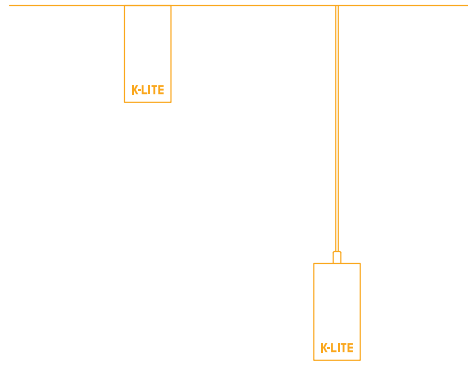

REVO


Flexible Design Multiple Applications

Revo luminaire is a versatile solution for projects that demand high quality of the lighting system and high visual comfort. With its modular design, the Revo can be used as an individual fixture or as a combination of luminaires put together in continuous lines.

K-LITE

REVO

Power : Upto 40W Upto 80W Upto 120W
Length: 1188mm 2365mm 3540mm



Features

- Nichia LED's
- CRI Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



Options

- CCT : 3000K / 4000K / 5700K or TW 2700K to 5700K
- Driver options



Beam Angle



Accessories




Canopy Kit for Dimmable options

SURFACE





PENDANT DIRECT



PENDANT DIRECT / INDIRECT



Dimension in mm

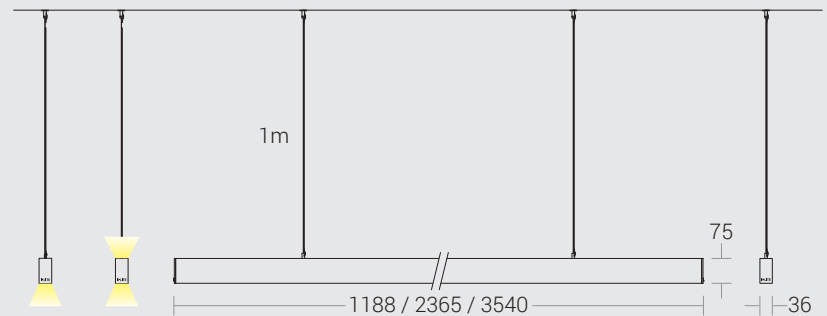

Housing Colour



Extruded aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution refer online





Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: Nichia
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 50°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Hexa-Cell (Matt Black)
UGR	: <16

Physical

Body	: Extruded Aluminium with Die-cast Endcaps
Mounting	: Surface / Pendant
Finish	: Black(RAL9005) White(RAL9016) Grey (RAL 9006)

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 4KV-6KV
Efficiency	: >85%



Ordering Guide

Pendant - Direct

ID	Wattage	Dimension (mm)
3465	Upto 40W	1188 x 36 x 75
3467	Upto 80W	2365 x 36 x 75
3468	Upto 120W	3540 x 36 x 75

Pendant - Direct & Indirect

ID	Wattage	Dimension (mm)
3427	Upto 40W & 15W	1188 x 36 x 75
3447	Upto 80W & 30W	2365 x 36 x 75
3448	Upto 120W & 45W	3540 x 36 x 75

Surface

ID	Wattage	Dimension (mm)
3443	Upto 40W	1188 x 36 x 75
3445	Upto 80W	2365 x 36 x 75
3519	Upto 120W	3540 x 36 x 75