

K-LITE

POWER WASH

Power : Upto 40W Upto 80W
Length : 1214mm 2400 mm

Upto
100
lm/w

Features

- Bridgelux / Equivalent LED's
- CRI Ra>80 (>90 On Request)
- SDCM \leq 3
- L70 / B10 @ 60,000 Hrs



Options



- CCT : 3000K / 4000K / 5700K
- Driver options



RECESS




Dimension
in mm

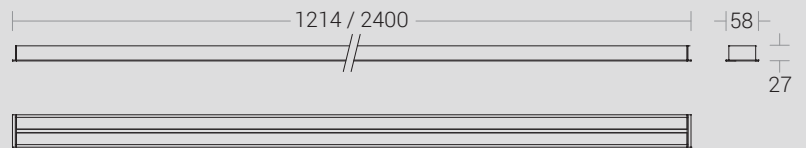


Housing Colour

- Extruded aluminium with powder coated finish in RAL9016 White fine texture | RAL9006 Grey fine texture

Light
Distribution

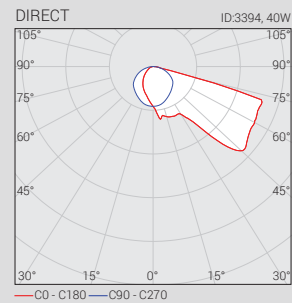

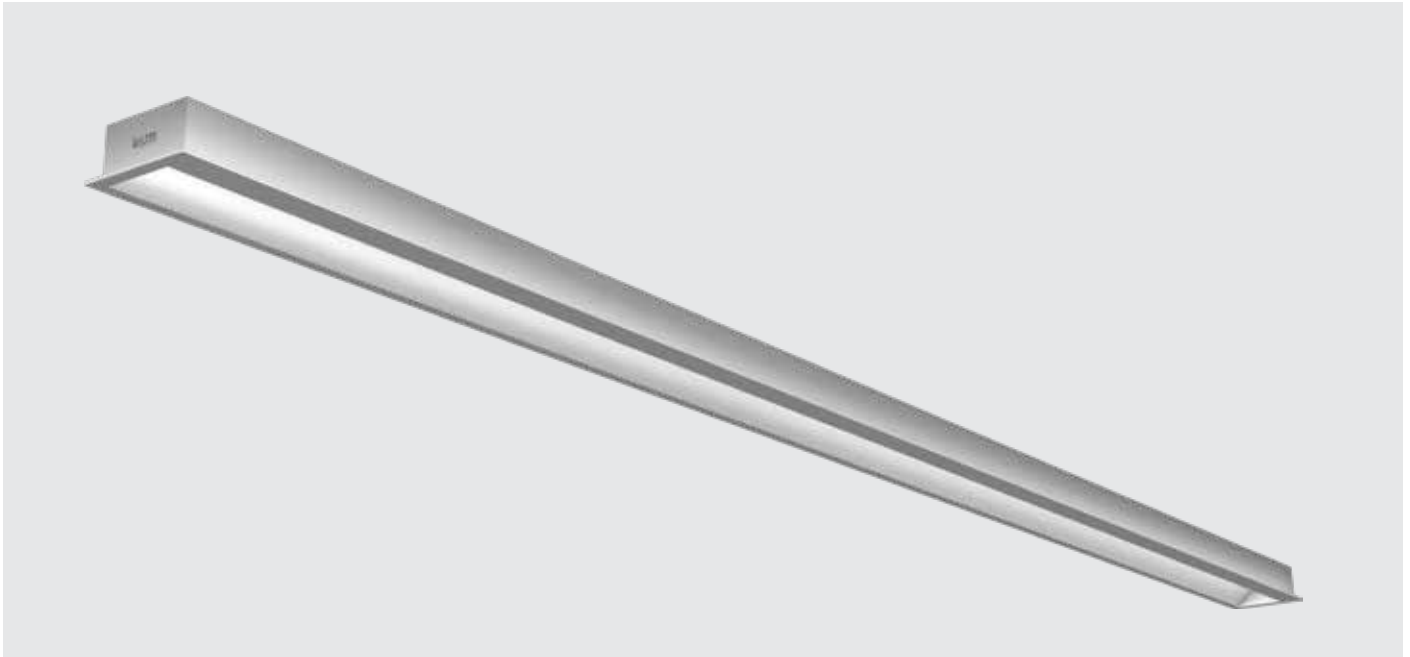

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium with Endcaps
Mounting	: Recess
Finish	: White(RAL9016) Grey (RAL 9006)

Light Source

Light Source	: Bridgelux / Equivalent
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Driver

Power Supply	: Integrated
Power Factor	: >0.95
THD	: <10%
Surge Protection	: Upto 3KV
Efficiency	: >85%

Optical

Tilt	: Fixed
Diffuser/Lens Material	: PC Opal diffuser
UGR	: <19



Ordering Guide

Recess

ID	Wattage	C.O.D	Dimension (mm)
3394	Upto 40W	1205 x 50	1214 x 58 x 27
3395	Upto 80W	2391 x 50	2400 x 58 x 27