

"Wall Dena" surface mounted range of LED wall light are a perfect fit for varied Indoor lighting applications. This type shall gracefully outlines the exhibits on display with the interior features of the architecture. Aesthetically shaped wall mounted luminaire for updown lighting effects.

Product Description

- Luminaire made of extruded aluminium with fabricated aluminium frame.
- Extruded aluminium housing profile designed to throw upward and downward lighting.
- Surface mounting on wall using hardware after connecting to the power supply.
- Cable entries for through-wiring of mains supply cable.
- Prewired with LED driver and suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-3980-CCT (Colour Temperature)
- Available CCT : 3000K, 4000K, 5700K.



Product Benefits


- Quick & simple installation.
- Environmental friendly.
- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.

Area of Application

Lobbies & Foyers, Retail Sector, Residential, Internal passages, Commercial & Business Centers, etc.

Available Finish

Sliver / Gold / Cream epoxy polyester powder coating.

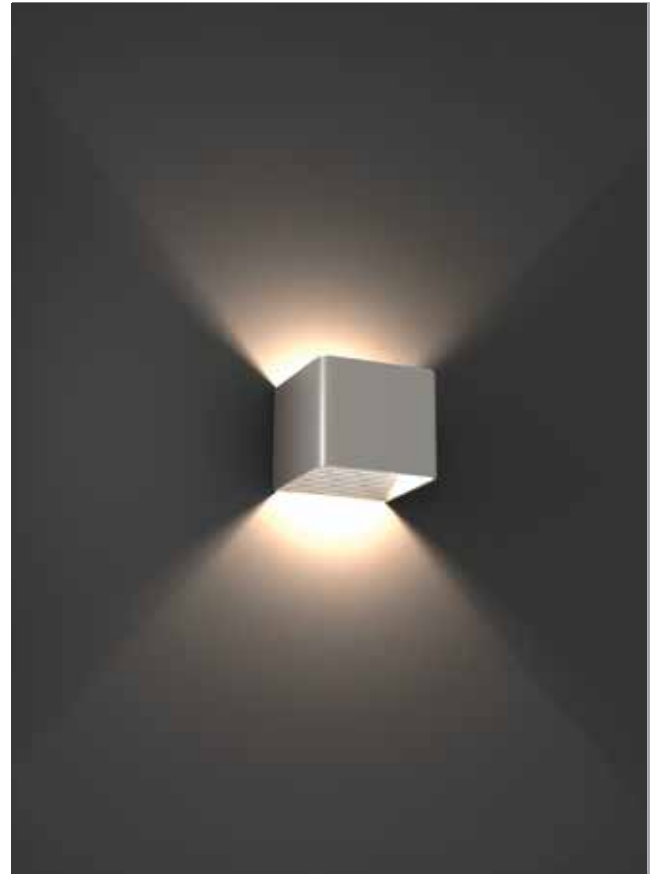



Technical Specifications

General

ID	: 3980
System Wattage	: 6W LED
Driver Integral	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 100-277 Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminum
Diffuser	: Clear Acrylic
Mounting	: Surface - Wall
Finish	: Powder coating Silver / Gold / Cream

Light Source


Light Source	: NICHIA
LED Lumens	: 680 lm
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 2KV
Efficiency	: >80%

Optical

Colour Temperature	: 3000K
Luminous flux	: 377 lm
Light Distribution	: 120°



Light Distribution

